




WICK® PICK-UP SLIP-ON




WICK® SI250 PERFORMANCE

Performance standard correction as per SAE J1349; 60° F / 15.5° C; Baro 29.92 in. / 101.3 mB

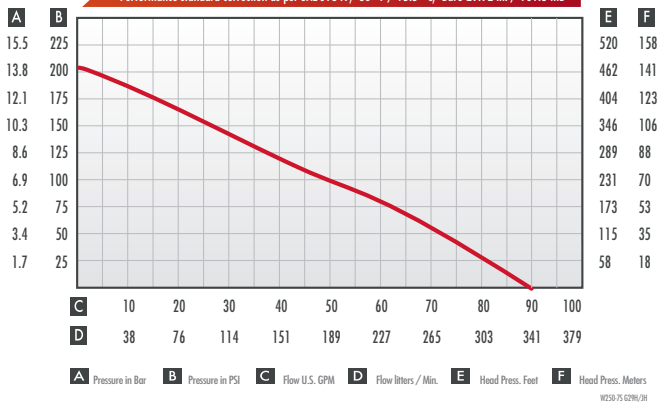

WICK® SI300 PERFORMANCE

Performance standard correction as per SAE J1349; 60° F / 15.5° C; Baro 29.92 in. / 101.3 mB

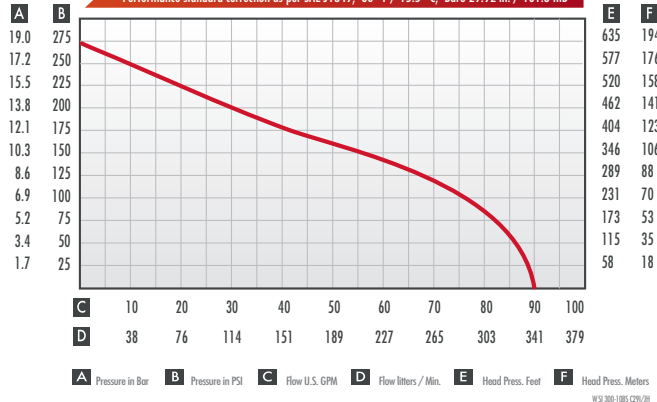

SLIP-ON UNIT COMPLETE WITH HIGH PRESSURE FIREPUMP

- 125 US Gallon (473 liters) NFPA compliant Baffled Tank
- WICK® SI 250 or WICK® SI 300 mounted on the tank
- Safety Bypass bleed line with Rapid Pump powered tank refill option
- Adjustable relief valve with 4' (1.2 M) of 3/4" (19 mm) bleeder line
- Storage hose trays front and back of the baffled tank for attack hose and suction hose storage

OPTIONAL :

- Hannay electric reel (aluminum base and stainless steel drum) mounted on the tank with control switch and feeder line. Also includes :
 - 100 feet (30.5 M) section of 3/4" (19mm) Boostlite™ reel hose
 - 1.0" (25 mm) Fog/straight stream nozzle
 - Valve for emergency shutoff
- Five sections of Draftlite™ Suction Hose to fit in the back storage tray
 - Four sections of 2.0" (51mm) x 4' (1.22M)
 - One section of 2.0" (51mm) x 3.5' (1.07M) with 2" (51mm) footvalve
- Delivery hose to fit in the front storage tray which includes :
 - Two sections of 1 1/2" (38 mm) x 75' (23 M) Fireboss® fire hose
 - Available with Aluminum threaded or Forged QC couplings
 - Multi-orifice nozzle connected to the above Fireboss® fire hose
- Spare Aluminum Barrel Nozzle with threaded or QC connection
- Hose wrenches
- Battery Box with battery, mounted on the tank
- Jack stack
- Drip Torch
- Rigid back tank with hand pump sprayer

WEIGHT & DIMENSIONS

Length (Depth)*	54.5"	138 cm
Width	48"	122 cm
Height	41"	90 cm
Weight .. with WICK® SI 250 (dry)**	525 lbs	239 Kg
Weight .. with WICK® SI 300 (dry)**	550 lbs	250 Kg

TANK ONLY

Length (Depth)	37.5"	83 cm
Width	47.0"	103 cm
Height	20.5"	45 cm

* Length (Depth) including front and rear hose trays

** Weight includes complete unit with all optional components

5838 Cypihot
Saint Laurent, QC
Canada, H4S 1Y5

PHONE 514.335.4337
PHONE 877.937.9660
FAX 514.335.9633

mercedestextiles.com
sales@mercedestextiles.com

© 2021 Mercedes Textiles Limited T01L / JH
 © Represents registered trademarks of Mercedes Textiles Limited, unless otherwise noted
 ™ Represents trademarks of Mercedes Textiles Limited, unless otherwise noted



WICK® PICK-UP SLIP-ON

BID SPECIFICATION

The unit must meet the following minimum requirements

- 125 US Gallon (473 liters) NFPA compliant Baffled Tank
- WICK® SI 250 or WICK® SI 300 fire pump mounted on the tank with surround guard
- Safety Bypass bleed line with Rapid Pump powered tank refill option
- Adjustable relief valve with 4' (1.2 M) of 3/4" (19 mm) bleeder line
- Storage hose trays front and back of the tank for attack hose and suction hose storage


Must also be available with the following optional components :

- Hannay electric reel (aluminum base and stainless steel drum) mounted on the tank with control switch and feeder line. Includes 100' (30.5 M) section of 3/4" (19mm) Boostlite™ reel hose with a 1" (25 mm) Fog/straight stream nozzle, plus valve for emergency shutoff
- Five sections of Draflite™ Suction Hose to fit in the back storage tray
 - Four sections of 2" (51mm) x 4' (1.22M)
 - One section of 2" (51mm) x 3.5' (1.07M) with 2" (51mm) footvalve
- Delivery hose to fit in the front storage tray which includes :
 - Two sections of 1 1/2" (38 mm) x 75' (23 M) Fireboss® fire hose
 - Available with Aluminum threaded or Forged QC couplings
 - Multi-orifice nozzle connected to the above Fireboss® fire hose
- Spare Aluminum Barrel Nozzle with threaded or QC connection
- Hose wrenches
- Battery Box with battery, mounted on the tank
- Jack stack
- Drip Torch
- Rigid back tank with hand pump sprayer



WICK® PICK-UP SLIP-ON

Part#	Description
74SL125WSI3	Pick-up Slip-on unit complete with 125 US gal/473L tank, Wick SI 300 high pressure fire pump, less Hannay reel. Choice of discharge threads (NH, NPSH; BSP; QC).
74SL125WSI2	Pick-up Slip-on unit complete with 125 US gal/473L tank, Wick SI 250 high pressure fire pump, less Hannay reel. Choice of discharge threads (NH, NPSH; BSP; QC).

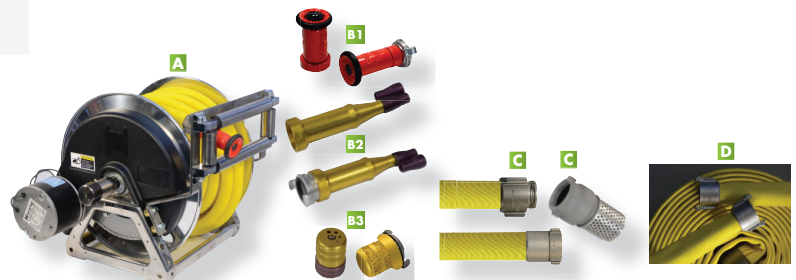

OPTIONAL

	Part#	Description
E1	70FLHPPQC	Hand Primer QC
E2	70FLHPPXX	Hand Primer NH or NPSH threads
F	74SLBTR5KIT*	Rigid Poly Back Tank complete c/w hand pump .. 5 gal US / 19L
G	74SLDRTCH*	Drip Torch (with mounting accessories)
H	70FLATOWNH	Hydro-Wick Jack Stack reducing adaptors from 2 1/2"/64mm NH to GHT threads
H	70FLATOWPS	Hydro-Wick Jack Stack reducing adaptors from 2 1/2"/64mm NPSH to GHT threads
I	73BW-1000	Foam Nozzle: Mini-Mousse 3/4"/19mm (for Back Pack Fire Ext.)
J	70FL15CPWR	Coupling Wrench

OPTIONAL

	Part#	Description
A	74SL125-REELAE*	Electric Hannay Reel complete with 100' x 3/4" (30M x 19mm) Boostlite®
B1	70FL10ZFGXX	Nozzle .. Fog / Straight Stream 1"/25mm .. various threads and QC
B2	70FL15ZBEXTG	Nozzle .. Barrel / Straight Stream 1 1/2"/38mm Alum .. Gold, various threads and QC
B3	70FL10ZMOXX	Nozzle .. Multi-Orifice - 1"/25mm .. various threads and QC
C	74SL20DL*	4 lengths of Draflite® HP suction hose .. 2"/51mm x 4' (1.2M) NPSH c/w Foot Valve / Strainer 2"/51mm
D	160150751TY	Fireboss fire hose 1 1/2"/38mm x 75' (23M) .. add choice of couplings
N/1	74SL125-REELAEBATW*	Battery Box with Battery (with mounting accessories)

* Pricing for these part numbers include any additional hardware, etc required for installation