




W4
 4-STAGE



FOUR STAGE FOAM COMPATIBLE PUMP

- Compact, high efficiency and superior reliability are the hallmarks of this pump
- Four stage hydraulics and modern engineering techniques have been combined resulting in high performance
- Interchangeable with other common detachable pump end products
- Designed for easy maintenance
- Applications for this pump are in the field where high pressures are required, such as for fire fighting over long hose lays and elevation

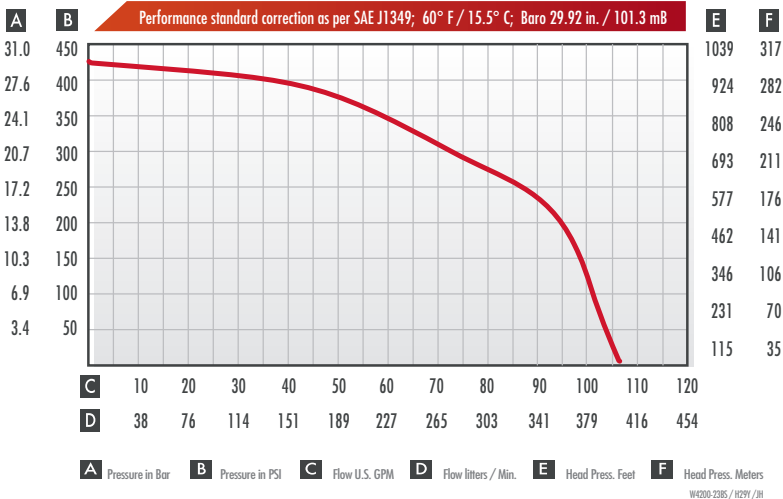

WEIGHT & DIMENSIONS

Length	11.0"	28.0 cm
Width	11.0"	28.0 cm
Height	11.0"	28.0 cm
Weight	14.7 lbs	6.7 kg
Suction	2.0" NPSH	50 mm
Discharge	1.5" NPSH	38 mm

PERFORMANCE

Performance indicated is obtained using our 23 HP Briggs & Stratton engine and a Hydro-Wick speed increaser

Note: Specifications subject to change without notice

5838 Cypihot
 Saint Laurent, QC
 Canada, H4S 1Y5

Phone 514.335.4337
 Phone 877.937.9660
 Fax 514.335.9633

mercedestextiles.com
 sales@mercedestextiles.com



W4
 4-STAGE

BID SPECIFICATION

- The pump must be four stage with integral bearings and be able to attach to a speed increaser or engine by the use of a one-piece mounting clamp
- The pump must be cast from aluminum and be foam compatible
- The pump must be equipped with a grease nipple and be easily disassembled for maintenance
- The pump discharge must be equipped with a fitting to accommodate accessories such as a pressure gauge or primer pump
- The pump must have minimum flow and pressures as shown in the performance chart on the opposite page



W4
 4-STAGE

WICK® W4

Part#	Description
79W1216S	4 Stage Pump End Complete / with sealed bearing
79W1216S-D	4 Stage Pump End Complete / with sealed bearing and bottom drain



ACCESSORIES

	Part#	Description
A	79W212	Pump Mounting Clamp
B	70FL20TPPS	Intake thread protector 2" / 51mm
C	70FL15TPPS	Discharge thread protector 1 1/2" / 38mm